

New 500 Platform Skid-Steer Loaders





The most popular frame size in Bobcat history got an M-pressive new upgrade.

Introducing the NEW 500 platform: the latest M-Series loaders from Bobcat.

Specifications


For operators already familiar with the 700 and 800 platform loaders, it's clear that "M" means more, as in more power, performance, comfort, visibility and machine protection. Now the M-Series lineup is even more complete, from the radius lift path and all-around versatility of the S510 to the extra power, vertical lift path, excellent reach and large, high-flotation tires of the S590.

Premium M-Series cab has new positioning for better visibility; increased cab space, best-in-class pressurized interior and reduction in cab sound levels provide the ultimate in comfort.

Stronger hydraulics and more than 20% improved attachment performance increase attachment productivity.

Increased performance; convenient, easy-to-use controls and many other features save you time and effort on the job. A host of M-Series machine protection features simplify daily maintenance and prevent damage to the machine. Of course, the hallmarks of Bobcat performance remain in the new 500 platform: the toughest construction, smart cooling and a maintenance-free chaincase. If you're looking for the most impressive performance in the most popular frame size, these are the loaders you've been waiting for.


Loader	\$510	\$530	\$550	S570	S590
Engine					
Horsepower	49 hp	49 hp	61 hp	61 hp	66 hp
Performance					
Rated Operating Capacity	1650 lb.	1850 lb.	1750 lb.	1950 lb.	2100 lb.
Tipping Load	3300 lb.	3700 lb.	3500 lb.	3900 lb.	4200 lb.
Operating Weight	5922 lb.	6207 lb.	6265 lb.	6395 lb.	6735 lb.
Travel Speed	7.4 mph	7.4 mph	7.4 mph	7.4 mph	7.4 mph
Travel Speed (2-Speed Option)	11.0 mph	11.0 mph	11.0 mph	11.0 mph	11.0 mph
Hydraulic System					
Standard Flow	17.1 gpm	17.1 gpm	17.1 gpm	17.1 gpm	17.1 gpm
Auxiliary High Flow Option	NA	NA	26.7 gpm	26.7 gpm	26.7 gpm
Dimension					
A Length with Bucket	133.0 in.	133.0 in.	133.0 in.	133.0 in.	133.0 in.
B Width with Bucket	68.0 in.	68.0 in.	68.0 in.	68.0 in.	68.0 in.
c Height with Operator Cab	77.8 in.	77.8 in.	77.8 in.	77.8 in.	77.8 in.
D Height to Bucket Hinge Pin	114.5 in.	119.0 in.	114.5 in.	119.0 in.	119.0 in.
Lift Path Type	Radius	Vertical	Radius	Vertical	Vertical
Factory Options					
Selectable Joystick Controls	Yes	Yes	Yes	Yes	Yes

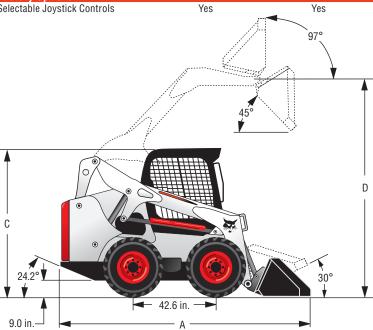

NOTE - Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. Pictures of Bobcat units may show other than standard equipment. All dimensions are given for loader equipped with standard tires. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Bobcat Company complies with the requirements of ISO 9001 as registered with BSI.

Bobcat® and the Bobcat logo are registered trademarks of Bobcat Company in the United

©2012 Bobcat Company. All Rights Reserved.





Bobcat Company • P.O. Box 6000 • West Fargo, ND 58078

Visit **bobcat.com/skidsteer** for more information